

## Mini Vox Instructions

### BASIC SYSTEM OPERATION

#### NOTE: Batteries Must Be Installed Before Use!

1. Position the MiniVox with the front/speaker facing toward your audience
2. Plug the wired microphone into the MIC jack  
(MIC-25 wired microphone is included)
3. Turn the MiniVox Power/Volume Level knob on, the red BATTERY LED will light and remain lit during operation
4. Set the wired microphone power switch to ON
5. Adjust the volume with the Power/Volume Level knob

**IMPORTANT:** To avoid feedback, do not position a microphone in front of speaker.

**PROBLEMS?** Consult the troubleshooting section on the back page of this manual.

### MINIVOX PA SYSTEM

MiniVox is a battery-operated handheld Public Address system that's easy to set-up & operate. Before using the MiniVox, you'll need to install the batteries as described below right.

If your unit is equipped with an RC-25 rechargeable battery kit, you must charge the batteries completely before use (see page 3).

### MINIVOX ACCESSORIES

**MIC-25 - Handheld Microphone**  
Handheld microphone w/ 6' coil cord & 1/4" connector.

**MIC-90P - Handheld Microphone**  
Dynamic, balanced, low impedance microphone w/ unidirectional pick-up pattern & 1/4" connector. Comes w/ 20' cable, storage case & mic clip.

**RC-25 - Rechargeable Battery Kit**  
Includes (9) rechargeable batteries and AC adapter/charger.

**CC-25 - Carrying Bag**  
Vinyl carrying bag with storage pocket for microphone.

**NOTE:** See page 6 for wireless microphones & UHF transmitters.

**BATTERY LED**  
Light will dim as battery power runs low, when light turns off it is time to replace batteries

**POWER / VOLUME LEVEL**

**CD / TAPE INPUT JACK**  
3.5 mm mini jack - mono

**MICROPHONE INPUT JACK**  
Phantom powered mic input for electret condenser microphones that require phantom power;  
3.5 mm mini jack

**AC-25 CHARGER INPUT JACK**  
2.5 mm sub-mini jack

**LO-Z MIC INPUT JACK**  
1/4" phone jack - unbalanced

**MINI-VOX**

**CD/TAPE**  
(LINE LEVEL)

**MICROPHONE**


**CHARGER**

**CAUTION:** Charger for use with Ni-Cad batteries only. Use Anchor's AC adapter model RC-25.

**MIC**



**Anchor Audio, Inc.**  
Torrance, California  
Made In USA

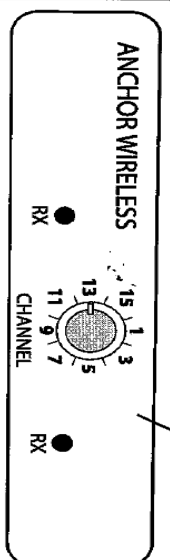


**WIRELESS RECEIVER CONTROLS**  
See page 6

**MINIVOX PA SYSTEM CONTROL PANEL**

Model Shown: PB-25U1

### BATTERY INSTALLATION

1. Remove the battery compartment cover located on the bottom of the MiniVox by turning the slotted fastener 1/4-turn counter-clockwise
2. Insert three "C" size batteries (alkaline-type work best) into each cardboard battery-holder as shown
3. Position the three battery tubes into the battery compartment with negative (flat) end contacting the springs (see label in compartment)
4. Replace the battery compartment cover and lock it in place by turning the fastener 1/4-turn clockwise



**IMPORTANT:** Use alkaline batteries for extended service life & greater output!