


Pipe and Drape Instructions

1. Place base plates in location of use



2. Slide upright poles over the post on the base.
Be sure the end with the notch is at the top

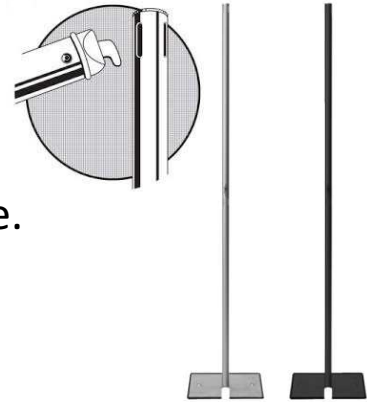

3. Adjust the length of the cross bar to the desired length by pressing in on the push buttons.

4. Thread the adjustable cross bar through the drapes



5. Insert the adjustable cross bar into the notched openings at the top of the upright poles.



6. Weigh down with sandbags to prevent tipping